




Demek Bearing Group Co., Ltd.

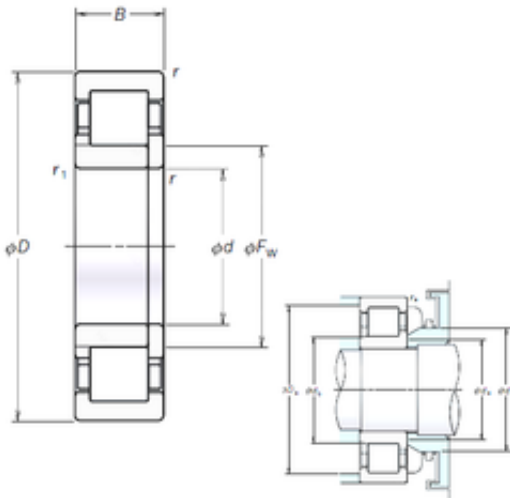

60 mm x 130 mm x 31 mm NSK NUP312EM cylindrical roller bearings

Bearing No. NUP312EM

NUP312EM Bearing 2D drawings and 3D CAD models

Size	60x130x31 mm
Bore Diameter	60 mm
Outer Diameter	130 mm
Width	31 mm
d	60 mm
Fw	77 mm
D	130 mm
B	31 mm
C	31 mm
r min.	2,1 mm
r1 min.	2,1 mm
da min.	71 mm
Da max.	119 mm
db max.	75 mm
db min	71 mm
ra max.	2 mm
rb max.	2 mm
S	1,5 mm
Db max	119 mm
Weight	2,06 Kg
Basic dynamic load rating (C)	150 kN
Basic static load rating (C0)	157 kN
(Grease) Lubrication Speed	4800 r/min
hidYobi	NUP312EM
LangID	1



Demek Bearing Group Co., Ltd.

D_	130
Macha rpm	9500
B_	31
hidTable	ecat_NSCLDR
Oil rpm	5600
rb	2
mass	2.14
GRS rpm	4800
ra	2
db max	75
TSR rpm	5600
C0	157
DE_	115
Prod_Type3	CRB_SR_NUP
da	71
DA_	19
Z_	13
D_a max	119
yobi	NUP312EM
dd min	86
C_conv	150000
ALPHA_	0
SDM_	96
r	2.1
dc min	79
KBRG	4165
SBRG	3
r1	2.1
DI_	77